

SPC


9000

2.5GigE 5G

Intel® Core Ultra Processor
Ultra-compact Fanless AI PC



▲ Robotic Slam

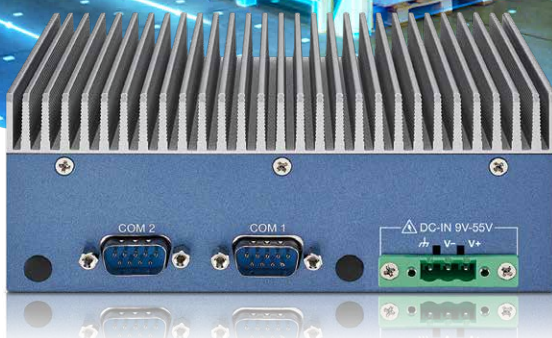

- Intel® Core™ Ultra processors feature a hybrid CPU/GPU/NPU architecture, improving CPU productivity by up to 14%.
- Intel® AI Boost NPU delivers 11 TOPS AI-focused performance
- Compact Design, fanless -40°C to 75°C Operation
- DC 9V to 55V Power Input, Software Ignition Power Control
- 2 USB 3.2 Gen 2, 1 USB 3.2 Gen 2x2 Type-C with DP, HDMI 2.1 and DisplayPort 1.4 support up to 4K resolution
- 2 2.5G LAN, 3 M.2 Socket for storage and expansion
- Optional SUMIT B expansions for 10GigE LAN, 10G SFP+, 4G Networks or SIM Sockets
- Supports Intel® vPro, TSN, TCC, and TPM 2.0
- Optional VHub One-Stop AIoT Solution Service supports OpenVINO™ toolkit for AI Computing


▼ Intelligent Vending



▲ Factory Automation



OpenVINO



VHub

Vecow

Specifications

System

| | |
|-----------|--|
| Processor | Intel® Core™ Ultra 7 165U Processor (12 Cores) Intel® Core™ Ultra 5 135U Processor (12 Cores) |
| NPU | Intel® AI Boost |
| Chipset | Intel® SoC |
| BIOS | AMI |
| GPU | Intel® Graphics |
| SIO | IT8786E |
| Memory | 1 DDR5 5600MHz SO-DIMM, up to 48GB |
| OS | Windows 11, Windows 10, Linux |

I/O Interface

| | |
|---------|---|
| Display | Supports Triple Display - 1 HDMI 2.1 : Up to 4096x2304 @60Hz - 1 DisplayPort 1.4 : Up to 4096 x 2304 @60Hz - 1 DisplayPort 1.4 : Up to 3840 x 2160 @60Hz by USB Type-C |
| Serial | 2 COM RS-232/422/485 (ESD 8KV) |
| USB | - 1 USB 3.2 Gen 2x2 Type-C support max 20Gbps and DP 1.4 (5V/3A) - 2 USB 3.2 Gen 2 Type-A |
| LED | Power, HDD, WWAN, WLAN |
| SIM | 1 External Nano SIM Card Socket |

Expansion

| | |
|-------|--|
| M.2 | - 1 M.2 Key B Socket (3042/3052, PCIe x2/USB 3, default/USB 2) - 1 M.2 Key E Socket (2230, PCIe x1/USB 2) |
| SUMIT | 1 SUMIT B (Optional, with customized chassis) |

Storage

| | |
|------|--|
| SATA | 1 SATA III (6Gbps) with internal 2.5" HDD/SSD bracket |
| M.2 | - 1 M.2 Key M Socket (2280, PCIe 4.0 x4) - 1 M.2 Key B Socket (2242, PCIe x2, share with expansion) |

Audio

| | |
|-----------------|---|
| Audio Codec | Realtek® ALC888S-VD, 7.1 Channel HD Audio |
| Audio Interface | 1 Mic-in, 1 Line-out |

Ethernet

| | |
|-------|--------------------------------------|
| LAN 1 | Intel® I226 2.5GigE LAN supports TSN |
| LAN 2 | Intel® I226 2.5GigE LAN supports TSN |

Power

| | |
|------------------|---|
| Power Input | DC 9V to 55V |
| Power Interface | 3-pin Terminal Block : V+, V-, Frame Ground |
| Ignition Control | 16-mode Software Ignition Control |
| Remote Switch | 3-pin Terminal Block |

Others

| | |
|----------------|--|
| TPM | Infineon SLB9672 supports TPM 2.0, SPI Interface |
| Watchdog Timer | Reset : 1 to 255 sec./min. per step |
| HW Monitor | Monitoring temperature, voltages. Auto throttling control when CPU overheats. |

Mechanical

| | |
|------------|--|
| Dimensions | SPC-9000 : 150.4mm x 106.2mm x 44.2mm (5.92" x 4.18" x 1.74") SPC-9100 : 150.4mm x 106.2mm x 57.0mm (5.92" x 4.18" x 2.24") SPC-9200 : 150.4mm x 106.2mm x 61.2mm (5.92" x 4.18" x 2.41") |
| Weight | SPC-9000 : 0.9 kg (1.98 lb) SPC-9100 : 1.3 kg (2.87 lb) SPC-9200 : 1.4 kg (3.09 lb) |
| Mounting | - Wallmount by mounting bracket - VESA Mount (Optional) - DIN Rail Mount (Optional) |

Environment

| | |
|-----------------------|--|
| Operating Temperature | SPC-9000 : -40°C to 60°C (-40°F to 140°F) with air flow SPC-9100 : -40°C to 75°C (-40°F to 167°F) with air flow SPC-9200 : -40°C to 70°C (-40°F to 158°F) with fan sink |
| Storage Temperature | -40°C to 85°C (-40°F to 185°F) |
| Humidity | 5% to 95% Humidity, non-condensing |
| Relative Humidity | 95% @75°C |
| Vibration | - IEC 60068-2-27 - SSD : 50G @ wallmount, Half-sine, 11ms |
| Shock | - IEC 60068-2-64 - SSD : 5Grms, 5Hz to 500Hz, 3 Axis |
| EMC | CE, FCC, ICES, EN50155, EN50121-3-2 |

* All product information may subject to change without prior notice.

* The rights of all brand names, product names and trademarks belong to their respective owners.
Copyright © 2024 Vecow Co., Ltd. All rights reserved.

Order Information

| Model | CPU | 2.5G | COM | USB 3 | | Thermal Solution |
|---------------|-------------------|------|-----|--------|--------|------------------|
| | | | | Type-A | Type-C | |
| SPC-9000-165U | Core Ultra 7 165U | 2 | 2 | 2 | 1 | Heat Spreader |
| SPC-9000-135U | Core Ultra 5 135U | | | | | |
| SPC-9100-165U | Core Ultra 7 165U | | | | | |
| SPC-9100-135U | Core Ultra 5 135U | | | | | |
| SPC-9200-165U | Core Ultra 7 165U | | | | | |
| SPC-9200-135U | Core Ultra 5 135U | | | | | |
| | | | | | | Heat Sink |
| | | | | | | Fan Sink |

Optional Software

| | |
|-------------------|----------------------|
| VHub AI Developer | AI Developer Kit |
| VHub ROS | AMR Developer Kit |
| VHub EtherCAT | I/O Control Platform |


Accessories

| | |
|--------------------|--|
| DDR5 48G | Certified DDR5 48GB 5600MHz RAM |
| DDR5 32G | Certified DDR5 32GB 4800/5600MHz RAM |
| DDR5 24G | Certified DDR5 24GB 5600MHz RAM |
| DDR5 16G | Certified DDR5 16GB 4800/5600MHz RAM |
| DDR5 8G | Certified DDR5 8GB 4800/5600MHz RAM |
| PWA-120W1 | 120W, 24V, 90V AC to 264V AC Power Adapter with 3-pin Terminal Block |
| VESA Mount | VESA Mounting Kit |
| DIN-RAIL | DIN-RAIL Kit |
| M.2 Storage Module | M.2 Key M/Key B Storage Module |
| 5G Module | 5G Module with Antenna |
| 4G Module | 4G/GPS Module with Antenna |
| WiFi & Bluetooth | WiFi & Bluetooth Module with Antenna |


Dimensions & Drawing

Unit : mm (inch)

SPC-9000

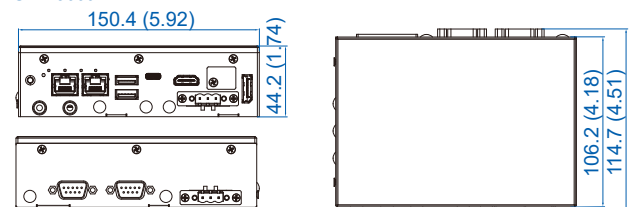

SPC-9100

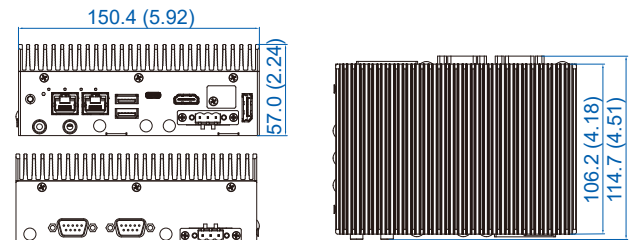

SPC-9200

